

Arctica Urban Market Series

Presentation is Everything™

Slimline Service / Self-Service

- SLS-38-64 38.25"L x 31.81"D x 63.63"H
- SLS-48-64 47.81"L x 31.81"D x 63.63"H
- SLS-57-64 57.38"L x 31.81"D x 63.63"H
- SLS-76-64 76.50"L x 31.81"D x 63.63"H

- Self-Contained
- Remote

*Arctica recommended for:
Pastries, Beverages and
Wrapped Sandwiches.*

Item #:	_____
Project:	_____
Date:	_____



Slimline Service / Self-Service	Standard Specifications:	Options:
Construction	<input type="checkbox"/> High grade plywood <input type="checkbox"/> Aluminum base structure <input type="checkbox"/> Levelers <input type="checkbox"/> Tilt-out front glass <input type="checkbox"/> Refrigerated upper & lower sections	<input type="checkbox"/> Dry upper section
Interior Finishes	<input type="checkbox"/> Epoxy powder painted (black)	<input type="checkbox"/> Epoxy powder painted (white) <input type="checkbox"/> Brushed stainless steel
Shelves	<input type="checkbox"/> 1/4" tempered glass	<input type="checkbox"/> Painted wire <input type="checkbox"/> Stainless steel <input type="checkbox"/> Additional light
Aluminum Trim	<input type="checkbox"/> Satin finish	<input type="checkbox"/> Chrome anodized <input type="checkbox"/> Brass anodized <input type="checkbox"/> Epoxy powder painted (black) <input type="checkbox"/> Epoxy powder painted (white)
End/Divider Glass	<input type="checkbox"/> 1/4" tempered glass	<input type="checkbox"/> 1/4" tempered glass mirrored
Sliding Doors	<input type="checkbox"/> Pike glass	<input type="checkbox"/> Pike glass with mirror film
End Panels/Decorboard/ Kickboard	<input type="checkbox"/> Plastic laminate on plywood	

1.800.839.5536


www.arctica.ca



Arctica Urban Market Series

Presentation is Everything™

Slimline Service / Self-Service

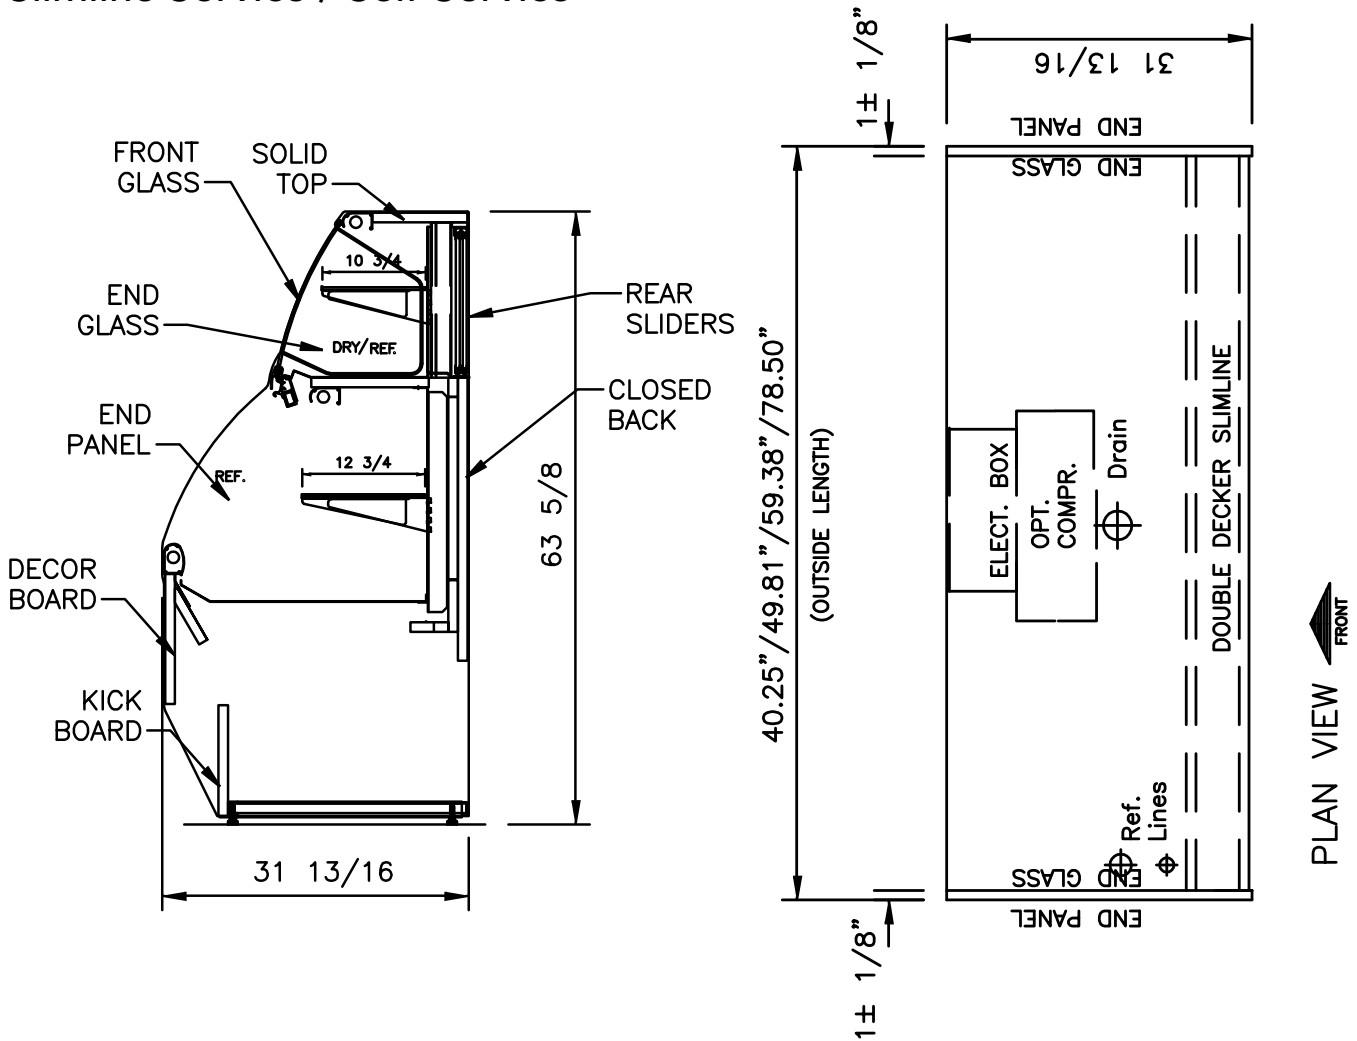

Model	Length (inches)	Length (millimeters)	Voltage	Amps (Remote)	Amps (Self-Contained)
SLS-38-64	38.25"	972mm	115V / 1 / 60 115V / 1 / 60	2.2	12.9 7.5* (opt.)
SLS-48-64	47.81"	1,214mm	115V / 1 / 60 115V / 1 / 60	2.4	13.1 7.5* (opt.)
SLS-57-64	57.38"	1,457mm	115V / 1 / 60 230V / 1 / 60	2.6	10.1* 8.7
SLS-76-64	76.50"	1,943mm	115V / 1 / 60 230V / 1 / 60	3.8	11.3* 8.7

*Call factory: (1) if you have drain accessibility, and/or (2) if you're looking for savings; depending on your geographic location, you could save 900 to 1500 Watts of electrical energy.

SPECS: aluminum support frame; leveling legs; brushed stainless steel refrigeration compartment; epoxy painted interior; anodized aluminum trim; .25 tempered shelves and front curved glass; tilt-out front glass standard.; lights with spectrum sleeves; 1" ply finished millwork; self-contained (R134a) with hot gas evaporator or remote; refrigerated cases are fitted with a defogging system that will keep the front glass clear of moisture in a controlled environment not exceeding 75°F and 55% relative humidity. ETL sanitation listed to NSF Standard 2, 4 and 7.

